

HYDRO-60

LED Batten



Description



The HYDRO LED Weatherproof Batten series is a direct replacement to traditional T8 and T5 Fluorescent battens. Custom designed to colour match concrete ceilings, and incorporating a "quick fix" solution to allow for ease and speed of installation. Constructed from high-quality and high impact resistant polycarbonate, with a high transparency frosted polycarbonate diffuser. Available in 600mm and 1200mm lengths, as well as Tricolour switchable: choose between Warm White 3000K, Neutral White 4000K, or White 5000K colour temperatures with the flick of a dip switch. Suitable for domestic applications such as underground basements, garages, and outdoor areas. Also commercially for underground carparks. Choose between supplied grey plastic clips or attached Stainless Steel clips depending on your installation preference.

Specification Features

Input Voltage:	240V
Power (W):	7.5W-15W (Switchable)
IP rating (IP):	IP65
LED type:	SMD
CCT:	3000K - 4000K - 5000K (Switchable)
Lumens (lm):	<div>7.5W</div> <div>Warm White 3000K - 950lm</div> <div>Neutral White 4000K - 980lm</div> <div>White 5000K - 950lm</div> <div>15W</div> <div>Warm White 3000K - 1850lm</div> <div>Neutral White 4000K - 1900lm</div> <div>White 5000K - 1850lm</div>
CRI:	≥80
Beam angle (°):	120°
Dimmable:	No
Lifespan (hrs):	50,000hrs
Installation:	Surface mounted or suspended



Diagrams / Additional

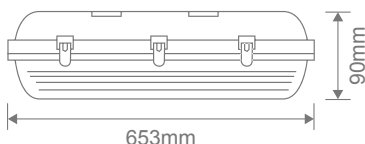

Item No.	Variant			CCT
	Non-Dim	On/Off Sensor*	Dim Sensor*	
HYDRO-60	66012	66028	66029	TRIO
SENSOR-INT-01-REM	N/A	66090	66091	N/A

*Remote Control Required



Internal ON/Off Sensor



Dimmable Sensor