

Installation Manual

AQUA-TILT-13

Date: 05/2018

BLACK		WHITE		Beam Angle	CCT	
Variant	Item No.	Variant	Item No.			
21302	AQUA-13-RND-BLK	21318	AQUA-13-RND-WHT	60°	2700K	13W Round LED Downlight
21306		21322		60°	3000K	
21310		21326		60°	4000K	
21314		21330		60°	5000K	


Thank you for purchasing your new LED AQUA, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

Voltage:	240V	Lumen (±5%):	Extra Warm White 2700K - 1130lm Warm White 3000K - 1130lm Neutral White 4000K - 1300lm White 5000K - 1220lm	Dimmable:	Yes*
Power:	13W	Beam Angle:	60°	Operating Temp:	-20°C~45°C
IP Rating:	65	CCT:	2700K - 3000K - 4000K - 5000K	Power Factor:	≥0.9
CRI:	≥80	Lifespan:	50,000hrs	Cutout:	Ø90-95mm



* Tested on the Domus dimmer series. May work on others but not tested.

Minimum clearance distances to flammable building elements.

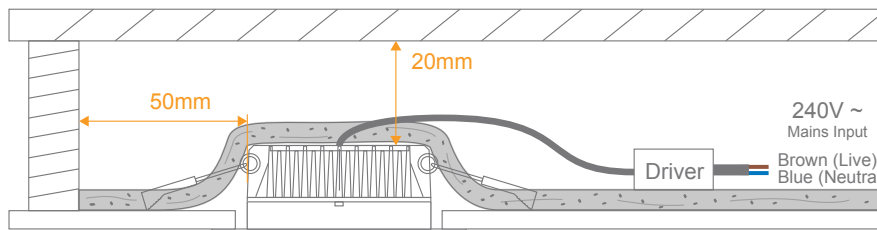


Note:


- The LED driver is NOT suitable for covering with insulation material.
- Warning-Risk of overheating or fire if the clearance distances are compromised.
- If the external flexible cable is damaged, it needs to be replaced by the manufacturer or his service agent.
- The light source of this luminaire is not replaceable; at the end of life the whole luminaire should be replaced.




1. Open a hole according to the cutout size of led downlight.



2. Use screw-driver to open the driver terminal cover, feed the main AC wire L.N. in terminal block respectively, then fix the cover back.



3. Connect the downlight with driver, hold back the spring clip then push the downlight into the hole.



4. Make sure the downlight fixed tightly in ceiling, turn on the power.

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas