

DECO-13

Order Code	Product Code	Description
20520	DECO-13-RND-W-WW	13W Downlight, Satin White Finish. 3000K Warm White
20519	DECO-13-RND-W-NW	13W Downlight, Satin White Finish. 4000K Neutral White
20521	DECO-13-RND-W-W	13W Downlight, Satin White Finish. 5000K White
20522	DECO-13-RND-A-WW	13W Downlight, Aluminium Finish. 3000K Warm White
20523	DECO-13-RND-A-W	13W Downlight, Aluminium Finish. 5000K White
20524	DECO-13-SQR-W-WW	13W Downlight, Satin White Finish. 3000K Warm White
20525	DECO-13-SQR-W-W	13W Downlight, Satin White Finish. 5000K White
20526	DECO-13-SQR-A-WW	13W Downlight, Aluminium Finish. 3000K Warm White
20527	DECO-13-SQR-A-W	13W Downlight, Aluminium Finish. 5000K White

Thank you for purchasing your new LED DECO-13, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications


Voltage:	240V AC	Lumen (±5%):	Warm White - 850lm Neutral White - 880lm White - 900lm	Dimmable:	Yes (Domus dimmer series)
Power:	13W	Beam Angle:	90°	Operating Temp:	-20° - 65°C
IP Rating:	44	CCT:	3000K - 4000K - 5000K	Lifespan:	50,000hrs
CRI:	>83				

How to install:

- The LED down light shall be installed in accordance to Australian/NZ electrical standards.
- The LED down light shall be installed in locations and in conditions as described in the below figure.
- Please make sure all electricity is switched off at the main switch board before any electrical works are to commence.
- Cut out the hole according to the downlight cutout table.
- The LED driver is supplied with an Australian approved 2pin flex and plug.
- For easy maintenance Domus recommends the use of plug base sockets in the ceiling.
- If you are intending to hard wire the LED drivers please remove the supplied flex and plug from the LED driver.
- When connecting the LED lamp/down light to the LED driver please ensure the connecting plug is securely pushed in and the connection is not loose.

Ceiling space cross section

Note: The driver must be over the insulation.

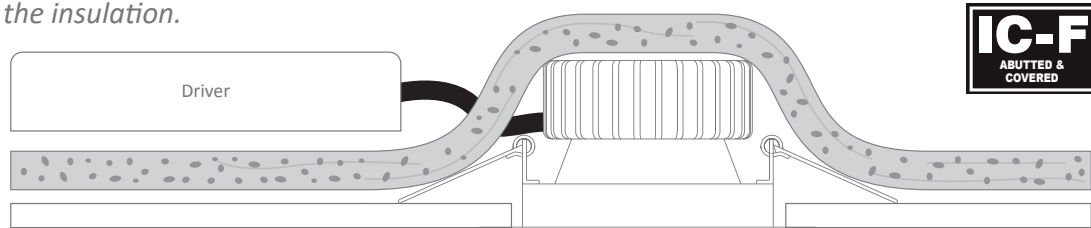

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas