

Neo-Pro-35-SM















LED Surface Mounted Downlight

Description

The NEO-PRO range of LED downlights are the latest upgrade to the NEO Series, with improved functions such as TRIO Tricolour switchable technology as well as a higher IP Rating for wet areas. Designed to reduce glare as well as maintaining high performance in light output and energy consumption. LED recessed downlight with anti-glare deep set frame, frosted diffuser, and an integrated dimmable LED driver with flex & plug. Fully dimmable with suitable dimmers.

Now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.

Specification Features

Input Voltage: 240V Power (W): 35 IP rating (IP): IP65**

Lumens (lm): Warm White 3000K - 3000lm

Neutral White 4000K - 3200lm

White 5700K - 3100lm

LED type: SMD

CCT: 3000K - 4000K - 5700K (Switchable)


CRI: ≥90 Beam angle (°): 75° Dimmable: Yes*

Lifespan (hrs): 50,000hrs

*Fully dimmable with suitable dimmers.



Diagrams / Additional

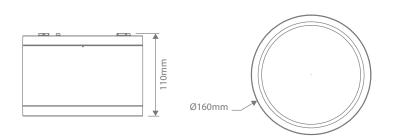

Item No.	Variant		CCT
	Wht	Blk	CCI
NEO-PRO-35-SM	20895	20894	TRIO
	DALI		
	21611	21612	TRIO

^{**}IP65 from front only.