



STEIN SE7148 - 32W

IP65 LED architectural wall luminaire - up and down

Application

A decorative residential exterior or interior solution

Design Specifications

- Die-cast aluminium body and powder coated body profile
- Clear tempered glass cover
- High efficiency COB LED chips
- High performance multifaceted reflector system, standard beam distribution 25°, narrow beam distribution < 25° available
- Integral constant current non-dimmable LED driver



Technical Specification


Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
SE7148WW/BK	LED WALL LIGHT 32W IP65 3K BK	240	32	1600	3000	80
SE7148WW/CB	LED WALL LIGHT 32W IP65 3K CB	240	32	1600	3000	80
SE7148CW/BK	LED WALL LIGHT 32W IP65 4K BK	240	32	1600	4000	80
SE7148CW/CB	LED WALL LIGHT 32W IP65 4K CB	240	32	1600	4000	80

Model No.	Beam Angle (°)	Dimensions (mm)	Body Colour
SE7148WW/BK	25	234(W) x 286(H)	BLACK
SE7148WW/CB	25	234(W) x 286(H)	CHARCOAL BLACK
SE7148CW/BK	25	234(W) x 286(H)	BLACK
SE7148CW/CB	25	234(W) x 286(H)	CHARCOAL BLACK

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

* Lumens and Power shown are TOTAL luminaire lumens (lm) and power (W).


Dimensions

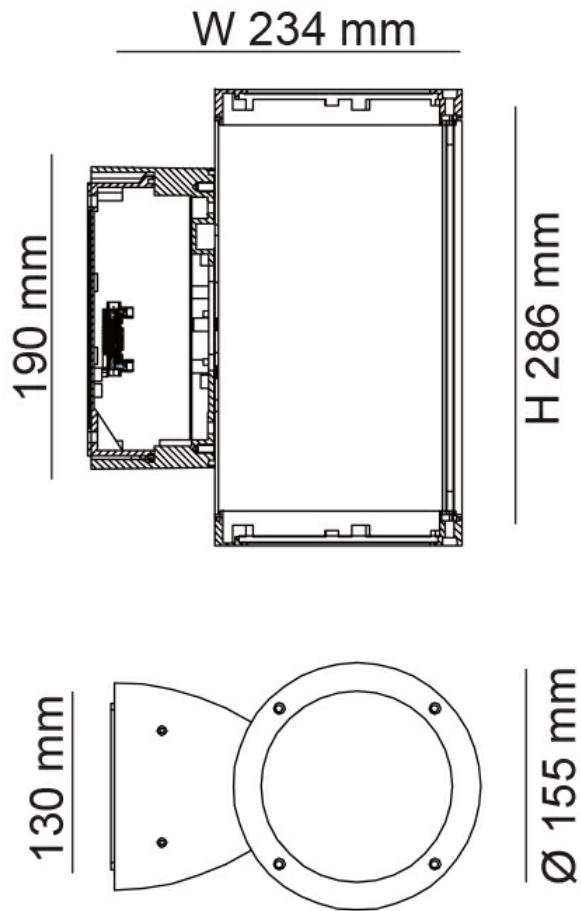

Photometric Data

Unit: cd C0/C180 _____ C90/C270 _____

SE7148WW at 3000K

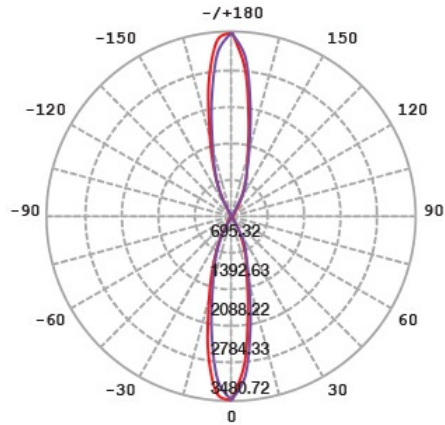

Product Images

BEAM STANDARD

- Upward & downward



BEAM OPTION

- Can be installed upward or downward facing

