



SOL SL9726TC - 20/40W

IP65 LED weatherproof batten with selectable colour

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications


- Colour temperature selectable by DIP switch, 3000 /4000 /6000K
- Rounded shape vandal proof design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable LED driver
- Sensor, emergency with LiFePO4 battery included, suspension kit options available
- Dimension: (LWH) 20 watt 642 x 118 x 77mm, 40 watt 1251 x 118 x 77mm

Performance

Dimmable Driver - **OPTIONAL**

In Built Sensor - **OPTIONAL**

Sensor Type - **MICRO**

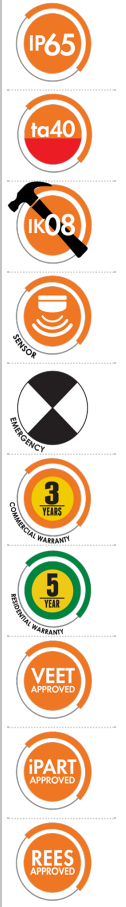

Technical Specification

Model No.	Description	Input (V)	Power (W)	Lumens (lm)	CRI	Body Colour
SL9726/20TC/DP	WEATHERPROOF 642mm IP65 3/4/6K DP	240	20	1800/900	80	GREY
SL9726/40TC	WEATHERPROOF 1251mm IP65 3/4/6K	240	40	3400/3700/3700	80	GREY
SL9726/20TC/EM	WEATHERPROOF 20W TC IP65 EM	240	20		80	GREY
SL9726/40TC/EM	WEATHERPROOF 40W TC IP65 EM	240	40		80	GREY

Model No.	CCT (K)
SL9726/20TC/DP	3000/4000/6000
SL9726/40TC	3000/4000/6000
SL9726/20TC/EM	
SL9726/40TC/EM	


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with SAL Terms and Conditions of sale and all images shown are for illustration purposes only and may vary from the actual colour or finish.

ACCESSORIES INCLUDED - PVC cable glands, Suspension brackets, INSTALLATION TYPE - Surface mounted, Suspended (Suspension kit is required),



Dimensions

(642 x 118 x 77mm), (1251 x 118 x 77mm)

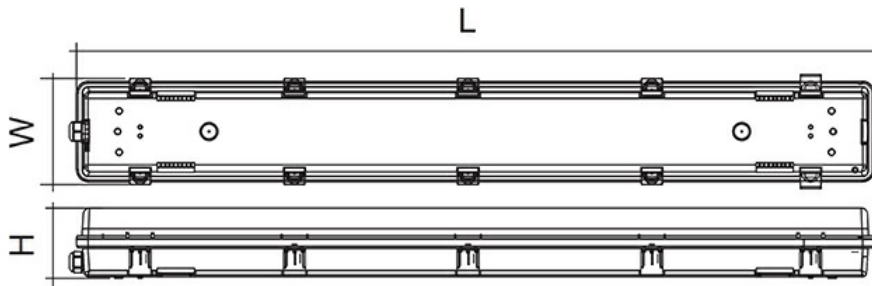

Product Images

