



SOL SL9726TC / HP - 11/22W

IP65 LED LOW POWER weatherproof batten with selectable colour

Application

Commercial or industrial utility applications requiring IP65 and IK08 performance

Design Specifications

- Colour temperature selectable by DIP switch, 3000 /4000 /6000K
- Rounded shape vandal proof design, robust polycarbonate body and UV stabilized polycarbonate diffuser
- Stainless steel clips & screws, 20mm cable gland entry
- Integral constant current non-dimmable, LOW POWER LED driver, 11 or 22 watt models
- Sensor, emergency, suspension kit options available
- Dimension: (LWH) 11 watt 642 x 118 x 77mm, 22 watt 1251 x 118 x 77mm



Performance

Dimmable Driver - **OPTIONAL**
In Built Sensor - **OPTIONAL**
Sensor Type - **MICRO**

Technical Specification

Model No.	Description	Input (V)	Power (W)	Lumens (lm)	CRI	Body Colour
SL9726/20TC/HP	WEATHERPROOF 642mm IP65 11W TC HP	240	11	990	80	GREY
SL9726/40TC/HP	WEATHERPROOF 1251mm IP65 22W TC HP	240	22	1900	80	GREY

Model No.	CCT (K)
SL9726/20TC/HP	3000/4000/6000
SL9726/40TC/HP	3000/4000/6000


Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

ACCESSORIES INCLUDED - PVC cable glands, Suspension brackets, INSTALLATION TYPE - Surface mounted, Suspended (Suspension kit is required),



Dimensions

(642 x 118 x 77mm), (1251 x 118 x 77mm)

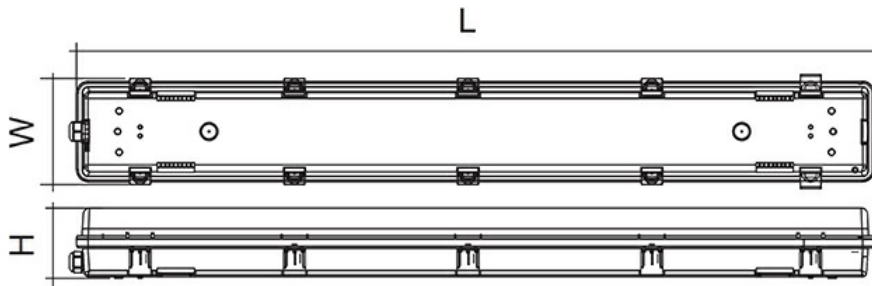

Product Images

