



ECOLINE SL9732 - 20/40W

LED narrow diffused batten with selectable colour

Application

Conventional linear LED batten products for commercial service spaces

Design Specifications

- 65 mm narrow steel body
- Quality white powder coat finish with robust polycarbonate diffuser
- Large terminal block, easy installation
- Easy selectable colour temperature with an inbuilt DIP switch 3000, 4000, 5700K
- High efficiency SMD LED chips, CRI > 80 120 degree beam distribution
- Integral constant current non-dimmable LED driver 20 and 40 watt models, emergency options available compliant to AS/NZS2293



Technical Specification


Model No.	Description	Input (V)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL9732/20CW	LED DIFFUSED BATTEN 65X600 4K	240	20	1900	4000	80
SL9732/20DL	LED DIFFUSED BATTEN 65X600 6K	240	20	1900	5700	80
SL9732/20TC	LED DIFFUSED BAT 600mm 3/4/6K	240	20	1900	3000/4000/5700	80
SL9732/40CW	LED DIFFUSED BATTEN 65X1140 4K	240	40	3800	4000	80
SL9732/40DL	LED DIFFUSED BATTEN 65X1140 6K	240	40	3800	5700	80
SL9732/40TC	LED DIFFUSED BAT 1140mm 3/4/6K	240	40	3800	3000/4000/5700	80

Model No.	Body Colour
SL9732/20CW	WHITE
SL9732/20DL	WHITE
SL9732/20TC	WHITE
SL9732/40CW	WHITE
SL9732/40DL	WHITE
SL9732/40TC	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

Dimensions

SL9732 20

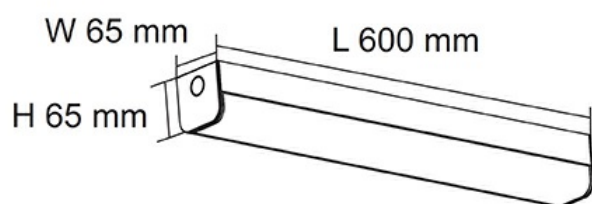

SL9732 40

