



## ECOLINE HP SL9732 - 10/20W

LED narrow diffused batten with ECO power design

### Application

Conventional linear (half power) LED batten products for commercial service spaces

### Design Specifications

- 65 mm narrow steel body
- Quality white powder coat finish with robust polycarbonate diffuser
- Large terminal block for easy installation
- Integral constant current non-dimmable LED driver, ECO Power 10 or 20 watt models, available in 4000K or 5700K
- High efficiency SMD LED chips, CRI > 80, 120 degree beam distribution



### Technical Specification


Model No.	Description	Input (V)	Power (W)	Lumens (lm)	CCT (K)	CRI
SL9732/20DL/HP	LED DIFFUSED BATTEN 65X600 5.7K 10W	240	10	1100	5700	80
SL9732/40DL/HP	LED DIFFUSED BATTEN 65X1135 5.7K 20W	240	20	2300	5700	80
SL9732/20CW/HP	LED DIFFUSED BATTEN 65X600 4K 10W	240	10	1100	4000	80
SL9732/40CW/HP	LED DIFFUSED BATTEN 65X1135 4K 20W	240	20	2300	4000	80

Model No.	Body Colour
SL9732/20DL/HP	WHITE
SL9732/40DL/HP	WHITE
SL9732/20CW/HP	WHITE
SL9732/40CW/HP	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

### Dimensions

SL9732 20

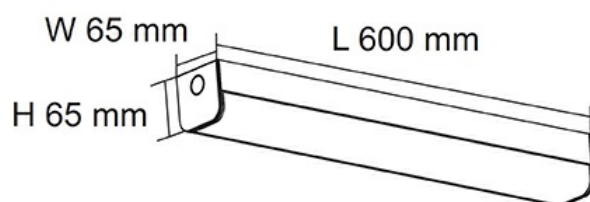

SL9732 40

