



ECOLINE EMERGENCY SL9732EM - 20/40W

Compliant to AS/NZS 2293, narrow body profile

Application

Perfect for interior commercial emergency lighting installations

Design Specifications

- Narrow steel body (65mm) body profile, white powder coat finish
- Designed with a large terminal block for easy installation
- LiFePO4 battery technology for long life
- High efficiency SMD LED chips on board
- Selectable colour temperature DIP switch, 3000/4000/5700K




Technical Specification

Model No.	Description	Input (V)	Power (W)
SL9732/20EM	LED EMG DIFFUSED BAT 600x65mm	240	20
SL9732/40EM	LED EMG DIFFUSED BAT 1135x65mm	240	40

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

Dimensions

SL9732 40

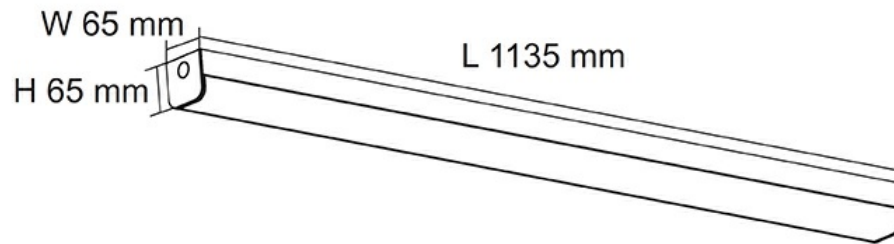

SL9732 20

