



PIP SPL020


Ultra slim 5 watt architectural pendant luminaire

Application

A creative design for residential or commercial spaces

Design Specifications

- Ultra Slimline suspended tube profile, 30mm diameter, two body profile lengths to select (300mm to order or 450mm as standard)
- Flush recessed ceiling plate to suit a standard 72 mm cut out
- Durable aluminium body profile
- High efficiency COB LED chips, 160 lm
- Recessed downlight mounting installation with standard adjustable wire length up to 1.2 m
- Built-in constant current non-dimmable LED driver

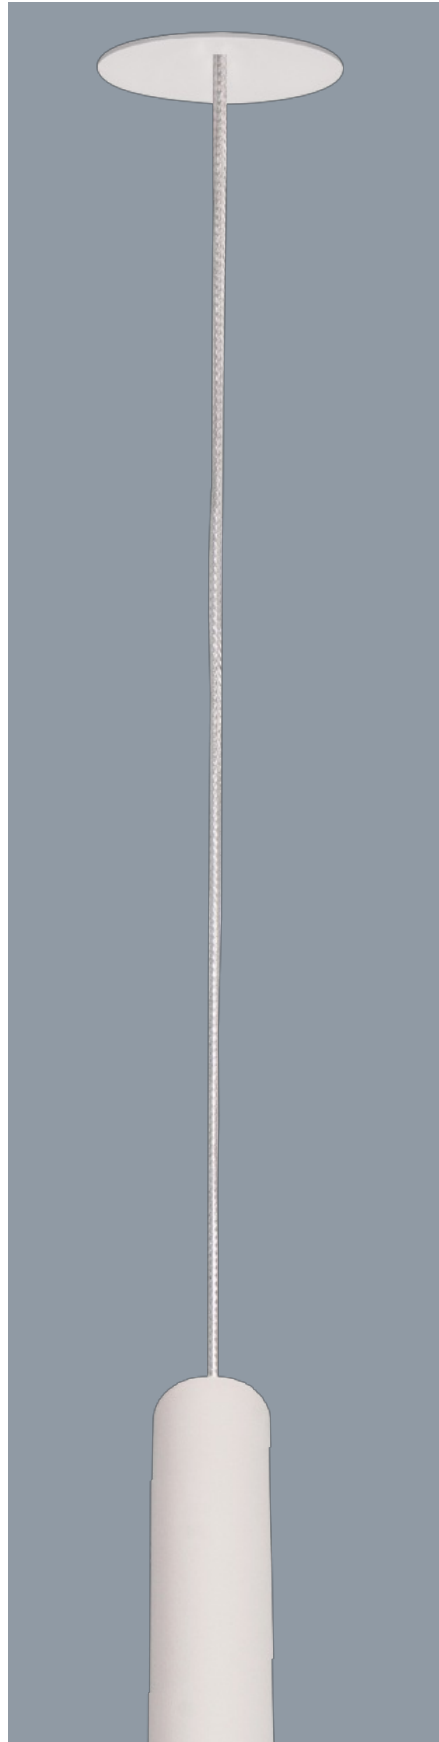



Technical Specification

Model No.	Description	Input Voltage (V/AC)	Lumens (lm)	CCT (K)	Power (W)	CRI
SPL020WW30	LED PENDANT 5W 300mm 3K WHITE	240	160	3000	5	80
SPL020WW45	LED PENDANT 5W 450mm 3K WHITE	240	160	3000	5	80

Model No.	Body Colour
SPL020WW30	WHITE
SPL020WW45	WHITE

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.