



## UNITREK STR9017 - 9W

Dimmable 9 watt architectural track spot, with integral driver - Unitrek single circuit

### Application

Ideal for decorative interior and retail designs

### Design Specifications

- Architectural cylindrical profile
- Aluminium body profile, colour matt white or black
- High efficiency COB LED chip, CRI > 80, CCT 3000K or 5000K
- Changeable multifaceted reflector system, polycarbonate lens, 40 degree beam distribution, 25 and 60 degree options
- 9 watt integral trailing edge dimmable driver

### Performance

Dimmable - **YES**

Dimmer Type - **Trailing edge**




### Technical Specification

Model No.	Description	Input Voltage (V/AC)	Power (W)	Lumens (lm)	CCT (K)	CRI
STR9017/9W/WW/WH	LED TRACK SPOT 9W 3K WHITE	240	9	700	3000	80
STR9017/9W/WW/BK	LED TRACK SPOT 9W 3K BLACK	240	9	700	3000	80
STR9017/9W/NDL/WH	LED TRACK SPOT 9W 5K WHITE	240	9	800	5000	80
STR9017/9W/NDL/BK	LED TRACK SPOT 9W 5K BLACK	240	9	800	5000	80

Model No.	Beam Angle (°)	Body Colour	Dimensions (mm)
STR9017/9W/WW/WH	40	White	65(W) x 165(H)
STR9017/9W/WW/BK	40	Black	65(W) x 165(H)
STR9017/9W/NDL/WH	40	White	65(W) x 165(H)
STR9017/9W/NDL/BK	40	Black	65(W) x 165(H)

Due to continued product and technology enhancements, data sourced from sal.net.au shall not form part of any contract and or technical performance guarantee unless expressly confirmed in writing by SAL at the time of order. Products are sold in accordance with [SAL Terms and Conditions of sale](#) and all images shown are for illustration purposes only and may vary from the actual colour or finish.

## Dimensions

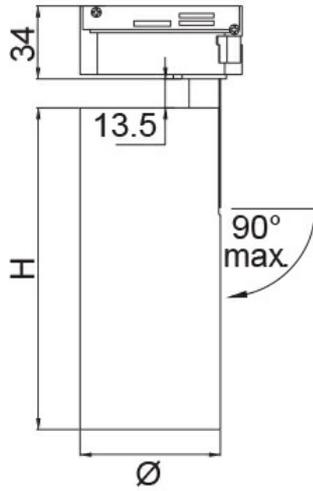

## Photometric Data

Unit: cd C0/C180 \_\_\_\_\_ C90/C270 \_\_\_\_\_

**STR9017/9W/WW at 3000K**

