

BLISS-10 TRIO

Order Code	Product Code	Description
20700	BLISS-10-TRIO-RND-W-WW	10W Downlight, Satin White Finish.

Thank you for purchasing your new LED BLISS-10 TRIO, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications


Voltage:	240V AC	Lumen (±5%):	Warm White - 750lm Neutral White - 780lm White - 800lm	Dimmable:	Yes (Domus dimmer series)
Power:	10W	Beam Angle:	120°	Operating Temp:	-20° - 65°C
IP Rating:	44	CCT:	3000K - 4000K - 5000K (Switchable)	Lifespan:	40,000hrs
CRI:	>83				

How to install:

- The LED down light shall be installed in accordance to Australian/NZ electrical standards.
- The LED down light shall be installed in locations and in conditions as described in the below figure.
- Please make sure all electricity is switched off at the main switch board before any electrical works are to commence.
- Cut out the hole according to the downlight cutout table.
- The LED driver is supplied with an Australian approved 2pin flex and plug.
- For easy maintenance Domus recommends the use of plug base sockets in the ceiling.
- If you are intending to hard wire the LED drivers please remove the supplied flex and plug from the LED driver.
- To set the colour temperature, simply move the dip switch located at the back of the fitting to the desired colour temperature.

Ceiling space cross section

Note: The driver must be over the insulation.

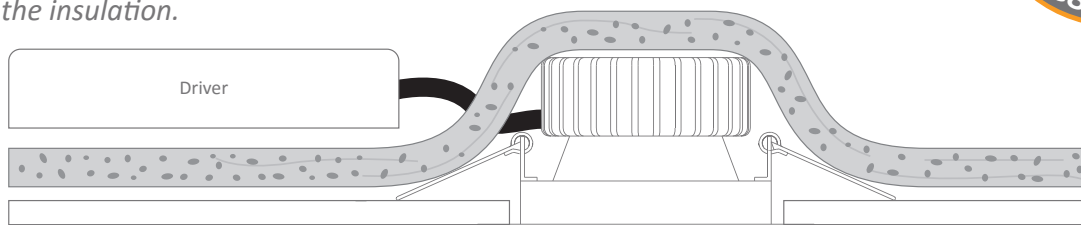

Recessed Luminaire where fixed building insulation material can abut and cover the recessed luminaire. Building Insulation does not have to be non flammable. Building Insulation must maintain structural integrity at 90 degrees C.
Important: IC-F Downlights are not to be used in the Fire Rated Applications.

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas