

Installation Manual


Date: 07/2018

CELL-9 Specifications


| | | | | | |
|------------|----------|--------------|--|-----------------|------------|
| Voltage: | 200-240V | Lumen (±5%): | Extra Warm White 2700K - 800lm Warm White 3000K - 810lm Neutral White 4000K - 910lm White 5000K - 880lm | Dimmable: | Yes |
| Power: | 9 | Beam Angle: | 15°/24°/36°/60° | Operating Temp: | -10 - 40°C |
| IP Rating: | IP44 | CCT: | 2700K - 3000K - 4000K - 5000K | | |
| CRI: | ≥80 | Lifespan: | 50,000hrs | | |

Thank you for purchasing your new LED CELL-9, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.


1. Push the module into the fitting

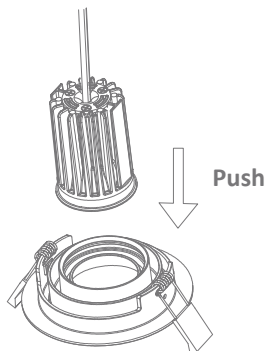


2. Connect the Driver

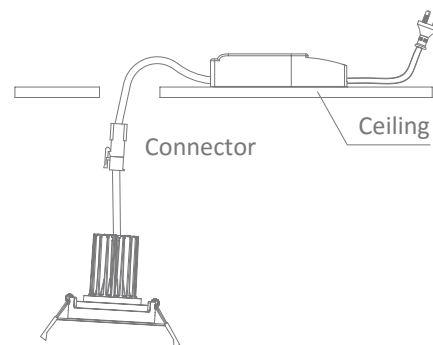


3. Straighten the springs into the ceiling

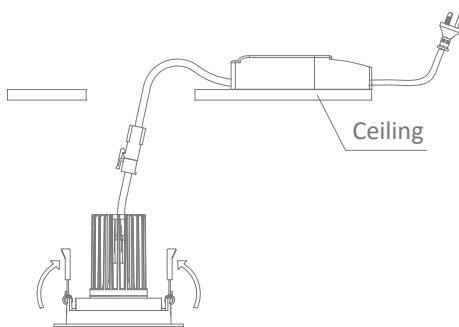



4.

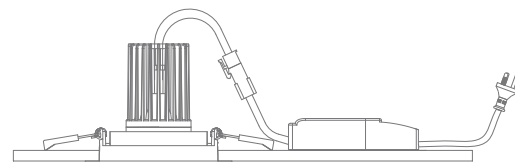

Voltage:
AC200-240V 50/60Hz



Minimum clearance distances to flammable building elements.

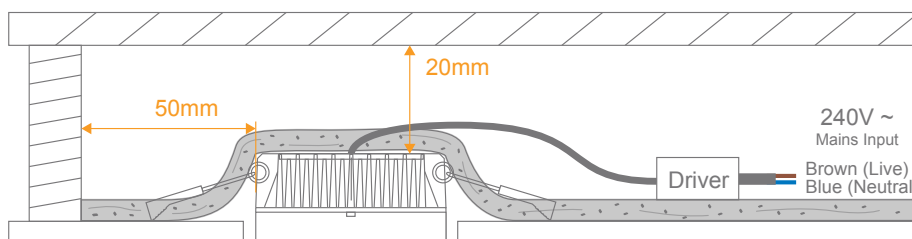

Note:

- The LED driver is NOT suitable for covering with insulation material.
- Warning-Risk of overheating or fire if the clearance distances are compromised.
- If the external flexible cable is damaged, it needs to be replaced by the manufacturer or his service agent.
- The light source of this luminaire is not replaceable; at the end of life the whole luminaire should be replaced.

Note: -The lamp must be installed by professional electrician
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use
-Keep away from hot steam and corrosive gas

CELL-9 Order Codes

06/2018

| Variant | Item No. | Beam Angle | CCT | Description |
|---------|----------|------------|------------------------|-------------------|
| 27000 | CELL-9 | 60° | 2700K Extra Warm White | Modular Downlight |
| 27001 | | 36° | | |
| 27002 | | 24° | | |
| 27003 | | 15° | | |
| 27004 | | 60° | 3000K Warm White | |
| 27005 | | 36° | | |
| 27006 | | 24° | | |
| 27007 | | 15° | | |
| 27008 | | 60° | 4000K Neutral White | |
| 27009 | | 36° | | |
| 27010 | | 24° | | |
| 27011 | | 15° | | |
| 27012 | | 60° | 5000K White | |
| 27013 | | 36° | | |
| 27014 | | 24° | | |
| 27015 | 15° | | | |