NO UV/IR



Expo-35-Rec LED Recessed Downlight

Description

The Expo-35 Recessed Led Down light range is designed to offer Low glare lighting solutions to any commercial or residential application. Ideal for conference rooms, restaurants, hotels and living spaces. Featuring an aluminium deep-set body and high gloss mirror reflector, includes dimmable LED driver flex & plug, and also with TRIO, the added option of changing the colour temperature output.



LED

44

ies


3yr

Specification Features

Input Voltage:	240V AC	
Power (W):	35W	
IP rating (IP):	IP44	
Lumens (lm):	Warm White 3000K - 3650lm Neutral White 4000K - 3750lm White 5700K - 3850lm	
LED type:	SMD	
CCT:	3000K - 4000K - 5700K (Switchable)	
CRI:	≥80	
Beam angle (°):	80°	
Dimmable:	Yes	
Lifespan (hrs):	50,000hrs	
Cutout (Ø):	Ø200-210mm	



Diagrams / Additional

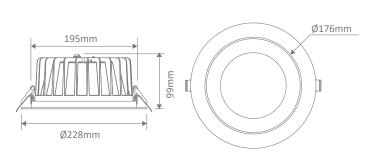

Cuttout: Ø200-210mm

Item No.	Variant	Colour Temperature
EXPO-35-REC-BLK	20714	TRIO
EXPO-35-REC-WHT	20715	TRIO