

## Installation Manual


### IXIS-RECESSED

Variant	Item No.	Description
19835	IXIS-REC-BLK	Die Cast Aluminium Recessed Steplight, 3000K Warm White. Black finish.
19836	IXIS-REC-BLK	Die Cast Aluminium Recessed Steplight, 5000K White. Black finish.
19466	IXIS-REC-SLR	Die Cast Aluminium Recessed Steplight, 3000K Warm White. Silver finish.
19467	IXIS-REC-SLR	Die Cast Aluminium Recessed Steplight, 5000K White. Silver finish.
19837	IXIS-REC-WHT	Die Cast Aluminium Recessed Steplight, 3000K Warm White. White finish.
19838	IXIS-REC-WHT	Die Cast Aluminium Recessed Steplight, 5000K White. White finish.

Thank you for purchasing your new LED IXIS-RECESSED, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

### Specifications

Voltage:	240V AC	Lumen (±5%):	Warm White 3000K - 160lm White 5000K - 220lm	Dimmable:	No
Power	2W	CCT:	3000K-5000K	CRI:	≥80
IP Rating	65	Operating Temp:	-30~+45		

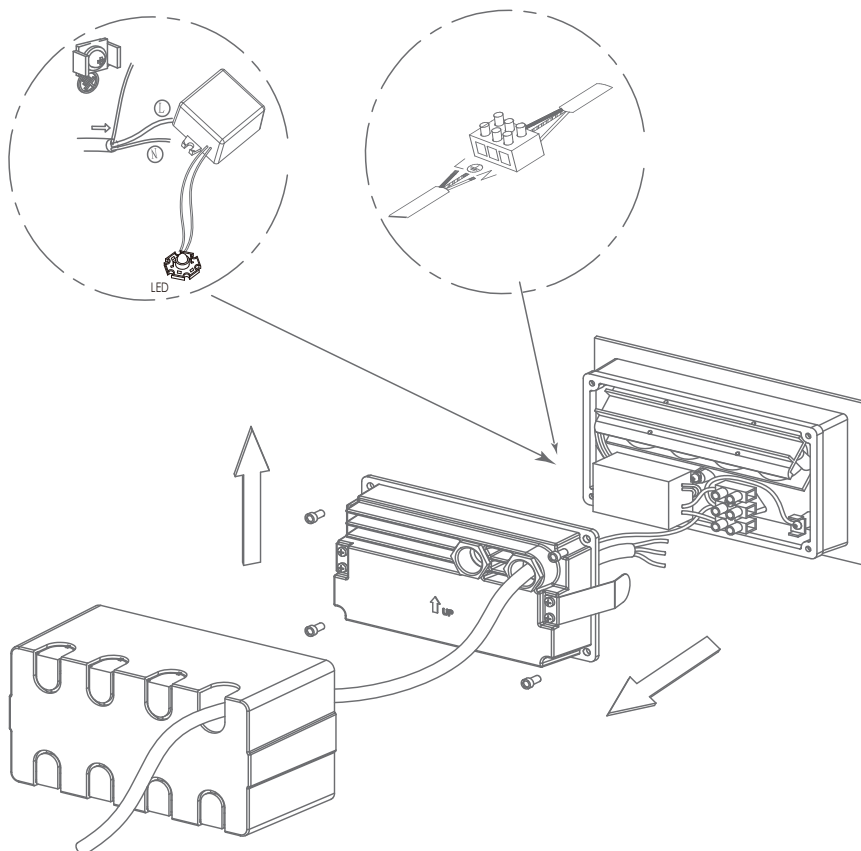

Must use round rubberised flex cable through the cable gland.

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas