

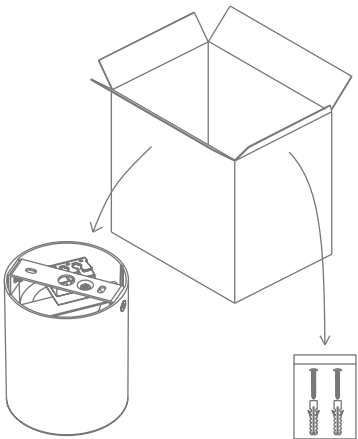
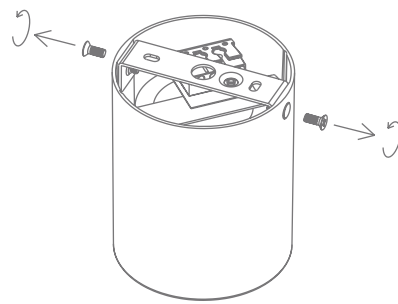
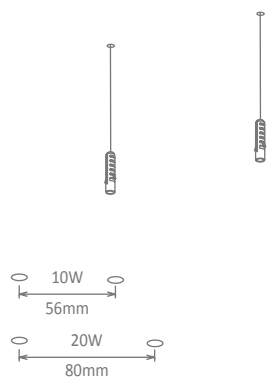
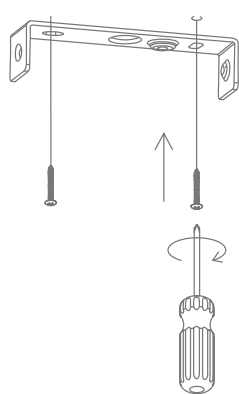
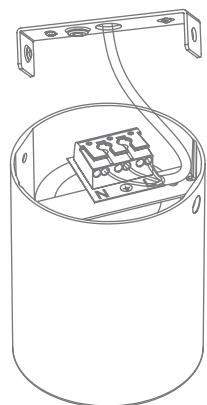



## Installation Manual

### NEO-SM-TILT-20 Specifications

Date: 05/2018

Voltage:	240V	Lumen (±5%):	Extra Warm White 2700K - 2050lm Warm White 3000K - 2100lm Neutral White 4000K - 2200lm White 5000K - 2300lm	Dimmable:	Yes
Power:	20W	Beam Angle:	24°/36°/60°	Operating Temp:	-20°C~45°C
IP Rating:	IP20	CCT:	2700K - 3000K - 4000K - 5000K	Power Factor:	0.85
CRI:	≥80	Lifespan:	50,000hrs		

Thank you for purchasing your new LED NEO-SM-TILT-20, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

<p>Step 1: Take out the fixtures and fitting from the carton.</p> 	<p>Step 2: Loosen the screws on surface mounted frame.</p> 	<p>Step 3: Hammer the anchors into the ceiling according to the hole distance</p> 
<p>Step 4: Fix the frame to the ceiling with screws provided.</p> 	<p>Step 5: Fix the "L" "N" "G" into the terminal block.</p>  <p> <span style="display: inline-block; width: 15px; height: 10px; background-color: brown; margin-right: 5px;"></span> L=BROWN  <span style="display: inline-block; width: 15px; height: 10px; background-color: blue; margin-right: 5px;"></span> N=BLUE  <span style="display: inline-block; width: 15px; height: 10px; background-color: yellow; border: 1px solid green; margin-right: 5px;"></span> ⊕=YELLOW-GREEN         </p>	<p>Step 6: Screw back the lamp to the frame according to step 2, adjust the lighting direction.</p>  <p>   </p>

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas

**Installation Manual**

**NEO-SM-TILT-20 Order Codes**

Variant	Item No.	Beam Angle	CCT	Description
21122	NEO-SM-TILT-20-WHT	24°	2700K Extra Warm White	Surface Mounted Downlight, White Satin Finish
21123		36°		
21124		60°		
21125		24°	3000K Warm White	
21126		36°		
21127		60°		
21128		24°	4000K Neutral White	
21129		36°		
21130		60°		
21131		24°	5000K White	
21132		36°		
21133		60°		
21110		NEO-SM-TILT-20-BLK	24°	
21111	36°			
21112	60°			
21113	24°		3000K Warm White	
21114	36°			
21115	60°			
21116	24°		4000K Neutral White	
21117	36°			
21118	60°			
21119	24°		5000K White	
21120	36°			
21121	60°			

**Note:** -The lamp must be installed by professional electrician -Do not touch the lamp when in use  
 -Ensure the power supply is switched off before fitting this product -Keep away from hot steam and corrosive gas