

29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia

Phone: 02 9554 9600 | Fax: 02 9554 9433

enquiries@domuslighting.com | www.domuslighting.com

Installation Manual

Date:04/2018 **NEO-35**


Order Code	Product Code	Description	
20580		35W LED Downlight, Satin White - 3000K Warm White	
20584	NEO-35-WHT	35W LED Downlight, Satin White - 4000K Neutral White	
20581		35W LED Downlight, Satin White - 5000K White	
20463		35W LED Downlight, Black - 3000K Warm White	
20464	NEO-35-BLK	35W LED Downlight, Black - 4000K Neutral White	
20465		35W LED Downlight, Black - 5000K White	

Thank you for purchasing your new LED NEO-35, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications


Voltage:	240V AC	Lumen (±5%):	WW 3000K - 3100lm NW 4000K - 3150lm W 5000K - 3200lm	Dimmable:	Yes (Domus dimmer series)
Power:	35W	Beam Angle:	60°	CRI:	≥80
IP Rating:	44	CCT:	3000K - 4000K - 5000K	Lifespan:	50,000hrs


Building above fitting

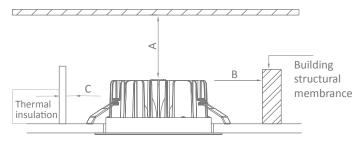


Install Requirements

A - Gap above the top of the fitting.	25mm
B - Side gap to the structural membrane.	25mm
C - Gap between thermal insulation.	25mm





2



3

Latch catch

Ceiling

B. Fasten the latch on the ceiling

Note: -The lamp must be installed by professional electrician

- -Ensure the power supply is switched off before fitting this product
- -Do not touch the lamp when in use
- -Keep away from hot steam and corrosive gas