

## Installation Manual

### PANEL-312-BLT

Date: 9/2019


Order Code	Product Code	Description
<b>17619</b>	<b>PANEL-312-BLT</b>	36W LED PANEL, white finish - TRIO

Thank you for purchasing your new LED PANEL-312-BLT, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.


### Specifications

Voltage:	240V	Lumen (±5%):	WW - 3010lm, NW - 3415lm, W - 3200lm	Dimmable:	No
Power:	36W	Lifespan:	40,000hrs	Operating Temp:	-20°C~45°C
IP Rating:	20	CCT:	3000K - 4000K - 5700K (switchable)	Power Factor:	≥0.9
CRI:	≥80				


#### Recessed into ceiling




1. Remove ceiling plaster tile.



2. Connect power supply.




3. Fix the panel light into the right place.




4. Stabilise the panel.


#### Suspending




1. Fix the anchor into target place on the ceiling.



2. Fix the installation mount on the ceiling with plastic anchor.




2. Hang the panel to ceiling with suspended installation kits.

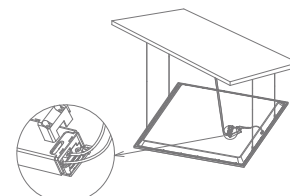


3. Adjust the length of steel wire. Connect the power supply.


#### Surface Mounted

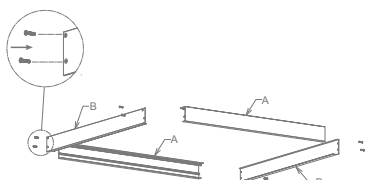


1. Assemble the surface mounted frame and fix by screws.

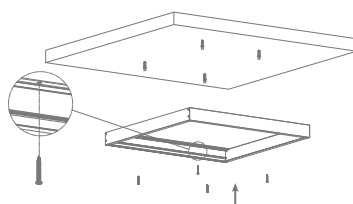


2. Knock the plastic anchor into ceiling, fix the surface mounted frame on the ceiling by screws.

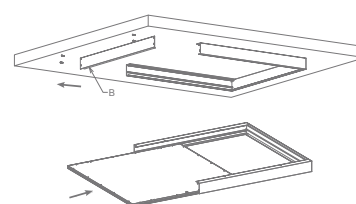

3. Fix the side frame back by screw.



4. Remove one side of the frame, connect the panel to power supply and insert the panel into the frame.



5. Ensure the frame and panel are firmly fixed, turn the power on.

**Note:** -The lamp must be installed by professional electrician  
-Ensure the power supply is switched off before fitting this product

-Do not touch the lamp when in use  
-Keep away from hot steam and corrosive gas