

SOLAR-SQR-300 Ceiling Light



Description

The SOLAR-SQR range of surface mounted LED ceiling lights feature a simple, round and unobtrusive design while providing a 120° beam of uniform light-output through the use of high intensity SMDs (Surface Mounted Diodes).

The SOLAR-SQR is constructed from polycarbonate and rated at IP54, making it ideal for usage in damp locations and in dwellings located close to coastal areas.

SOLAR-SQR LED ceiling lights are available now with TRIO, the added option of changing the colour temperature output of the downlight with a dip switch at the back of the fitting.. All models come complete with driver, (fully dimmable with the Domus dimmer series) have a lifetime of 40 000 hours and are backed by our Three Year Replacement Warranty.




Specification Features

- Input Voltage: AC 240V
- Power (W): 25W
- IP rating (IP): IP54
- Lumens (lm): Warm White 3000K - 2250lm
Neutral White 4000K - 2300lm
White 5700K - 2350lm
- LED type: SMD
- CCT: 3000K - 4000K - 5700K (Switchable)
- CRI: ≥80
- Beam angle (°): 120°
- Dimmable: Yes*
- Lifespan (hrs): 40,000hrs

* Tested on the Domus Dimmer Series. May work on others but not tested.



Diagrams / Additional

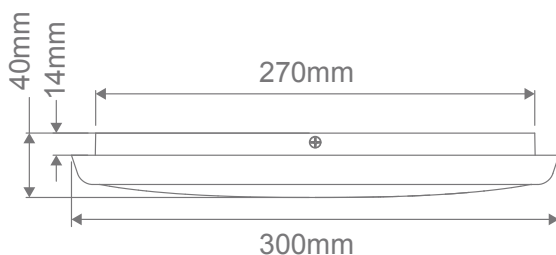

Item No.	Variant	Colour Temp
SOLAR-300-SQR-WHT	20944	TRIO
SOLAR-300-SQR-BLK	20946	TRIO