

29-31 Richland St. Kingsgrove. Sydney NSW 2208 Australia

Phone: 02 9554 9600 | Fax: 02 9554 9433

enquiries@domuslighting.com | www.domuslighting.com

Installation Manual


Date: 10/2018 **ZAC-4-SQR**

	•	
Variant	Item No.	Description
19735	ZAC-4-SQR-BLK-WW	LED recessed wall light, black finish. 3000K, warm white.
19736	ZAC-4-SQR-BLK-W	LED recessed wall light, black finish. 5000K, white.
19737	ZAC-4-SQR-DGR-WW	LED recessed wall light, dark grey finish. 3000K, warm white.
19738	ZAC-4-SQR-DGR-W	LED recessed wall light, dark grey finish. 5000K, white.
19739	ZAC-4-SQR-SLR-WW	LED recessed wall light, silver finish. 3000K, warm white.
19740	ZAC-4-SQR-SLR-W	LED recessed wall light, silver finish. 5000K, white.
19741	ZAC-4-SQR-WHT-WW	LED recessed wall light, white finish. 3000K, warm white.
19742	ZAC-4-SQR-WHT-W	LED recessed wall light, white finish. 5000K, white.

Thank you for purchasing your new LED ZAC-4-SQR, Please take the time to read and understand the instruction sheet below. Failure to do so may void warranty.

Specifications

Voltage:	240V AC	Lumen (±5%):	Warm White 3000K - 200lm White 5000K - 250lm	Dimmable:	No
Power:	4W	Beam Angle:	30°	Operating Temp:	-20°~45°
IP Rating:	IP65	CCT:	3000K - 5000K	Power Factor:	
CRI:	≥80	Lifespan:	50,000hrs		

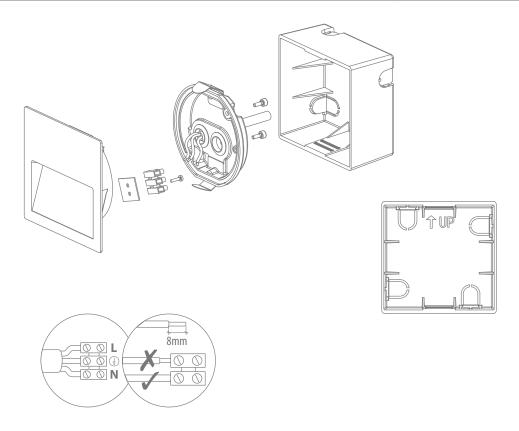

Cutout without recessed box: (L) 100mm x (W) 100mm Cutout with recessed box: (L) 110mm x (W) 110mm

- -Ensure the power supply is switched off before fitting this product
- -Do not touch the lamp when in use
- -Keep away from hot steam and corrosive gas